

# WOCA Colour Oil

- for the colouring and protection of wood floors  
either finished by hand or with machine



Preparing today for tomorrow



- For new or old wood floors
- Colours and protects in one application
- Certified by IBR

## Product info

Container: 1 and 2,5 litre

Consumption: 10-12 m<sup>2</sup>/litre

Available in: light brown, brazil brown, red brown, tea-chest brown, rhode island brown, walnut, castle grey, extra grey, extra white and black.



## Application area

Colour Oil is used to colour and oil unfinished or sanded wood in one application.

The choice of 10 colours and the combination with diverse priming treatments and types of wood allows a huge variety of colour impressions.

## Result

Due to the saturation with oil the wood surface is protected against water and dirt. The silky-mat surface is extremely robust and can be repaired without any problem.

## Application

Colour Oil may be applied both manually with a paintroller or with a polishing machine.

## After care


After the treatment with oil the surface is finalised with Colour Oil manually or with the polishing machine. Disperse the oil with a white/beige pad and polish with a clean, dry cotton cloth. The surface can be sealed with Oil Lacquer.

## Maintenance and cleaning

Maintenance cleaning with Natural Soap. Basic Cleaning with Wood Cleaner.


Maintenance with Colour Oil.

118 Extra white	101 Light Brown	102 Brazil Brown	104 Cherry Red Brown	105 Tea Chest Brown	106 Rhode Island Brown	114 Castle Grey	119 Walnut	314 Extra grey	120 Black
-----------------------	-----------------------	------------------------	-------------------------------	------------------------------	---------------------------------	-----------------------	---------------	----------------------	--------------

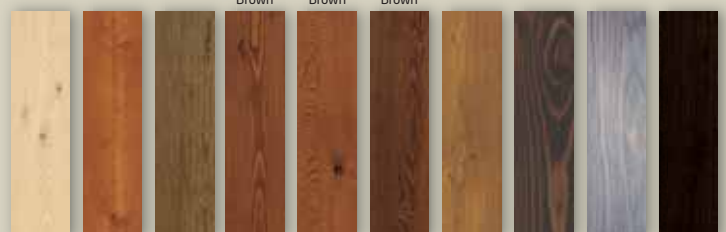

# How to do...

## - WOCA Colour Oil: Basic finishing of wood floors

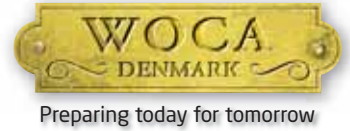

### Tools

A polishing machine with beige polishing pad.

Paintroller and cotton cloths.

Clean tools with Solvent.

### **Please notice!!**

*Risk of self-ignition! Due to the risk of self-ignition it is important that sanding dust and oil wetted cloths are soaked in water and disposed of in a tightly closed container after use.*

**Colour Oil colours and protects in one application. Suitable for all wood species as well as cork. Colour Oil may be used on both unfinished or freshly sanded interior woodwork.**

Suitable for oak, ash, spruce, larch, pine and teak, as well as cork. The oil brings out the natural wood grain and gives a hard-wearing surface, which is easy to maintain.

In order to obtain a uniform result, it is recommended to prime beech, spruce and pine wood with Maintenance Oil. After application, leave to dry for approx. 1 hour.

- 1 The floor or woodwork should be freshly sanded and completely clean, dry, and free from stains before the application of the Colour Oil. Clean with 125 ml Wood Cleaner mixed with 5 litre water.
- 2 Shake the container with Colour Oil well before and during application. Apply the oil in an even coat onto an area of approx. 15 m<sup>2</sup> with a short-haired paintroller. Let the floor absorb the oil for approx. 20 min. Subsequently, the oil is worked into the wood with a beige polishing

pad either manually or in case of large areas with a polishing machine. Polish for approx. 15 min. or until the floor appears saturated with oil.

- 3 Beware! Should any excess oil appear on the surface, remove this with cloths or paper or scrape onto next section of floor to be oiled. Buff floor with white polishing pads and with lint-free cotton cloths under the polishing machine.
- 4 The colour oiled floor is pre-hardened after approx. 6 hours at room temperature of 20° C and completely hardened after 72 hours. If a higher saturated surface is required, the finished floor may be buffed with 100 ml of Colour Oil to 10 m<sup>2</sup> of floor. This is done after the pre-hardening time and the oil must be polished carefully into the floor. Cover walking areas with corrugated cardboard for 72 hours. Do not expose the floor to water during the hardening time.