


PRODUCT INFORMATION

SASDURA water-based urethane finish is the next generation of one-component water-based floor finishes. The vehicle is 100% urethane.

The flow and levelling are similar to traditional oil-based urethane, while offering the odour and quick-drying advantages of water-based products.

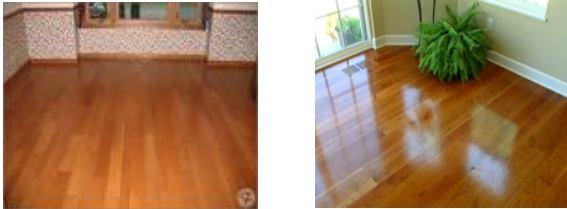

Available in the following sheens:

- #1090 – glossy
- #1050 – semi-gloss
- #1035 – satin
- #1020 – matt

Floors should be treated with high wear resistant finish. SASDURA water-based urethane provides protection, care and maintenance of the wood and is suitable for both hard wood and soft wood floors, as well as other interior wood such as kitchens, counter-top furniture, and doors.

USES

The increase in environmental awareness has demanded a need for water-based wood surface treatment. SASDURA (H₂O) floor finish was developed to answer the need, delivering a high quality finish with the professional, supplying excellent flow, levelling, and defoaming properties, wear resistance and excellent application properties.

SURFACE PREPARATION

- Sand floor with ≤ 150 grit sand paper. Do NOT fine sand.
- Vacuum floor thoroughly.
- Stain with Sasco stains if colour is wanted. Other stains must be tested for compatibility.
- Seal floor using SASDURA thinned approx. 10% with water.
- Do not apply SASDURA over floors treated with wax, non-drying oils, shellac or stearated sealer.

APPLICATION TOOLS and COVERAGE

- For best results, apply at room temperature between 60°F – 80°F (16°C – 27°C).
- SASDURA can be applied with a polyester brush, synthetic application paint-pad or T-bar, as well as sprayed, with an application spread rate of approx. 500 square feet per gallon.
- Allow to dry for at least 1 – 2 hours before applying next coat – depending upon the temperature.
- Always sand between coats, with 220-240 grit after the first coat, and 380-400 after the 2nd. This is mainly to remove the grain rising from the water being in contact with the wood.
- For industrial applications, thin the sealer coat with 10% water.

Note: low temperatures and /or high humidity levels will slow drying and curing time. Warm area to recommended temperature, or allow for extra drying and curing time.

TIPS

- Maintain floor with routine vacuuming
- Use felt floor protector under all furniture
- Do not use cleaner for 2 weeks after applying final coat.
- Wait 72 hours or more before allowing traffic on floor

CLEAN UP

Clean brushes or other application equipment with soap and lukewarm water

RECOATING EXISTING FLOORS

- Clean floor with WOCA (Trip Trap) Cleaner
- Sand old finish with 100-120 grit paper
- Prepare and apply additional SASDURA as mentioned above
- Adhesion pre-testing is required for floors which may have wax, or oils, etc.

SASCO Products Limited
3-10 Ilsley Avenue, Dartmouth, NS, Canada B3B 1L3
<http://www.sasco.ca>

Tel: 902-468-2126
Email: info@sasco.ca