

WOCA Bees' Wax

- for the waxing of indoor wood



Preparing today for tomorrow



- For the wax treatment of smaller wood surfaces
- Water- and dirt resistant
- Enhances the natural structure of the wood
- Certified by IBR

Product info

Container: 250 ml can
Available in natural and white

Container: 250 ml bottle
Available in natural

Consumption:
8-10 m²/250 ml



Application area

For the wax treatment of unfinished, stain- or lye treated wood surfaces (typically trays, wood accessories and smaller pieces of furniture).

Result

The treatment generates a silky-mat, smooth surface which is both water- and dirt resistant and enhances the natural structure of the wood.

Application

Use a dry cloth to polish on to clean and dustfree surfaces.

After care


Polish with a lint-free cotton cloth.

Maintenance and cleaning

If necessary clean the treated surface with Wood Cleaner or Natural Soap. If necessary maintain with Bees' Wax Balm.

How to do...

- WOCA Bees' Wax Balm and Bees' Wax Fluid:
Waxing of furniture and articles for everyday use

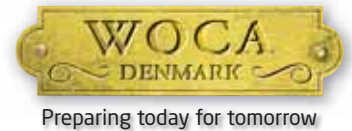

Tools

Soft lint-free cotton cloths for the application and lint-free cotton cloths or polishing pad for the polishing.

Clean tools with turpentine.

Bees' Wax Balm and Bees' Wax Fluid is used for the basic treatment and maintenance of untreated, stained or lye treated wood surfaces indoors (especially for furniture and toys).

Bees' Wax Balm and Bees' Wax Fluid is suitable for all wood species.

The wax treatment gives the wood a dirt resistant and easy to clean surface. Bees' Wax Balm and Bees' Wax Fluid is not suitable for flooring. Bees' Wax Balm and Bees' Wax Fluid is solvent free.

1 Before the application of Bees' Wax the wood must be clean, free from grease and completely dry. Apply Bees' Wax with a lint-free cotton cloth in a thin and even layer.

2 After a drying time of approx. 30 minutes the wood may be polished with a cotton cloth.

Tip: To obtain a hard-wearing surface rough wood may require an initial finish with Wood Floor Oil before it is treated with Bees' Wax after the drying time of the oil.

3 Bees' Wax may be applied in a thin layer and afterwards polished into the wood.